

FIG.1

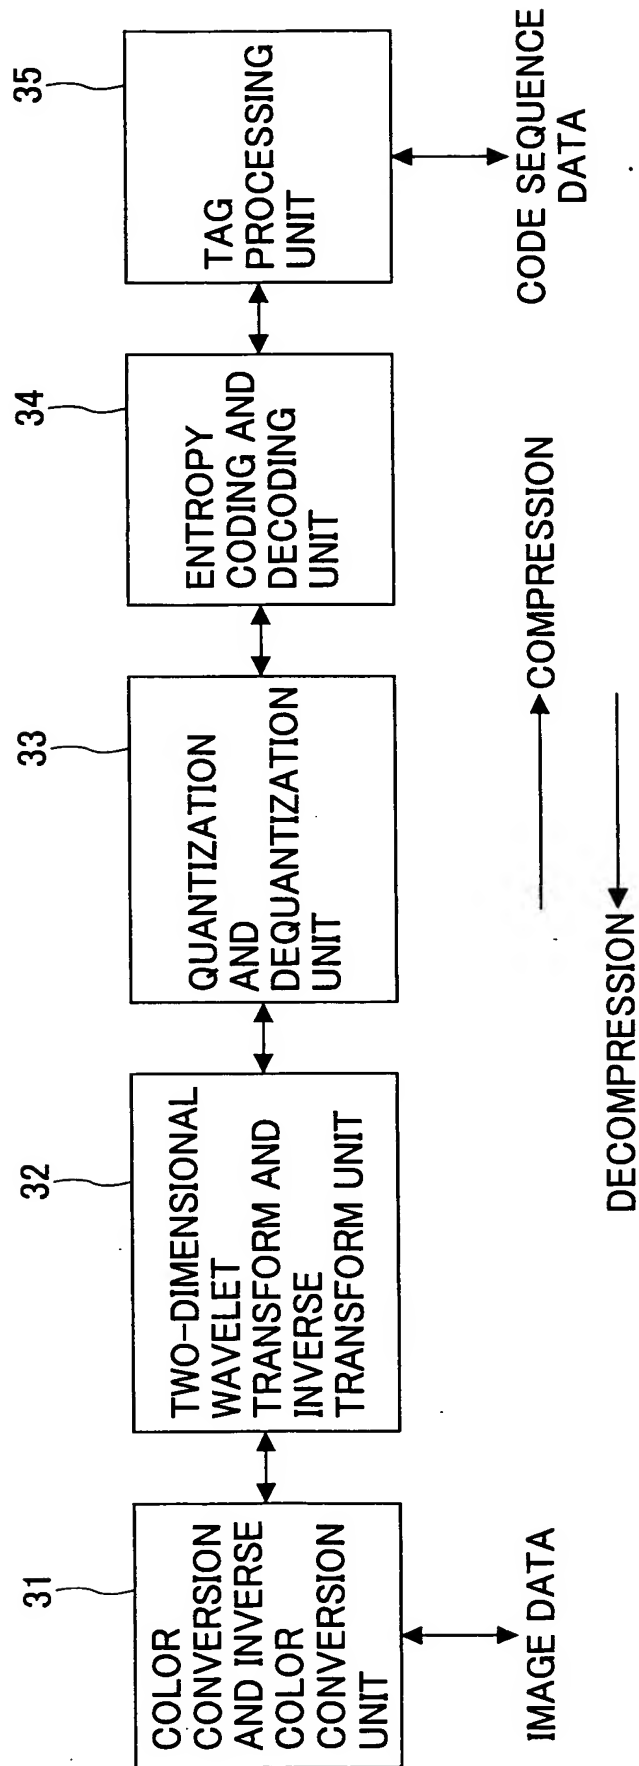


FIG.2

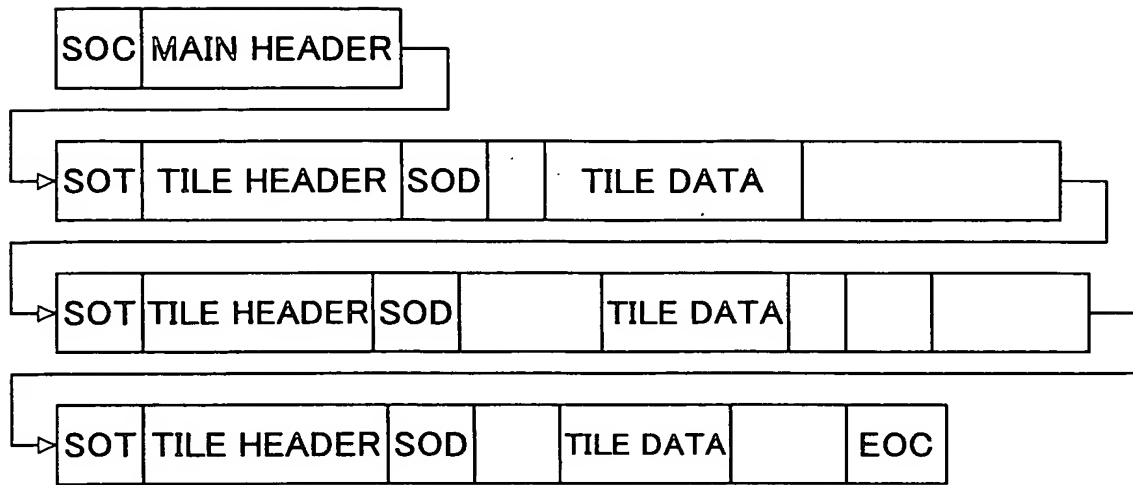


FIG.3

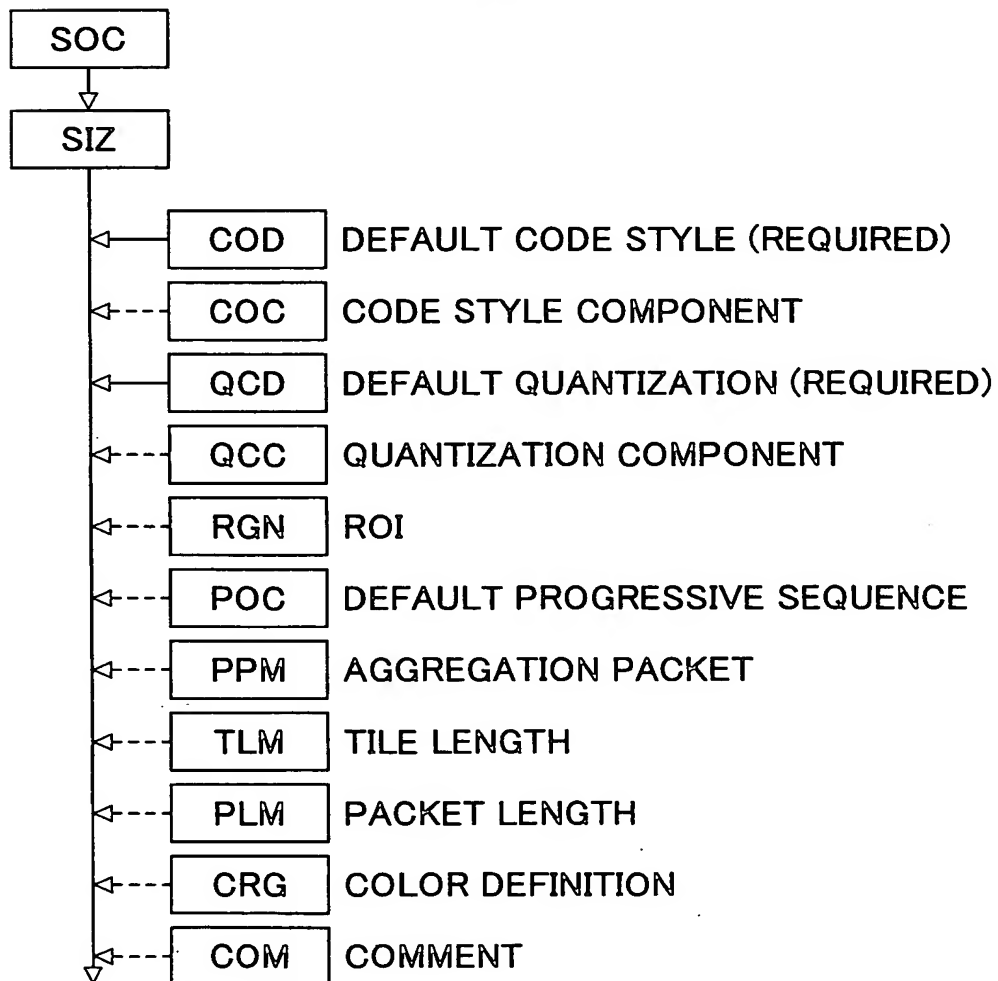


FIG.4A

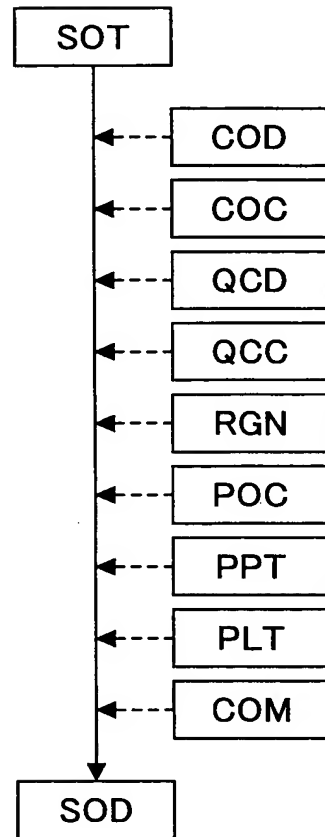


FIG.4B

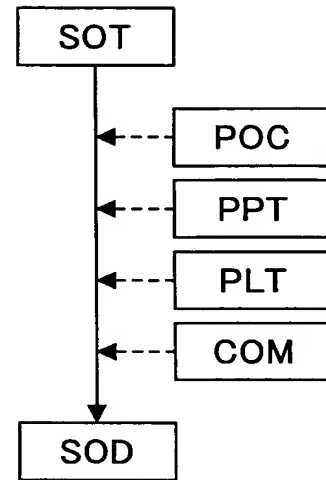


FIG.5

CRG	Lcrg	Xcrg (i)	Ycrg (i)		Xcrg (n)	Ycrg (n)
-----	------	-------------	-------------	--	-------------	-------------

FIG.6

COM	Lcom	Rcom	Ccom (i)		Ccom (n)
-----	------	------	-------------	--	-------------

FIG.7

Marker code range	Standard definition
0xFF00, 0xFF01, 0xFFFE, 0xFFFC0-0xFFDF	Defined in ITU-T Rec. T.81   ISO/IEC 10918-1
0xFFFD-0xFFFE	Defined in ITU-T Rec. T.84   ISO/IEC 10918-3
0xFFE7-0xFFE8	Defined in ITU-T Rec. T.87   ISO/IEC 14495-1
0xFFE4F-0xFFE6F, 0xFFE90-0xFFE93	Defined in this Recommendation   International Standard
0xFFE30-0xFFE3F	Reserved for definition as markers only (no marker segments)
	All other values reserved

FIG.8

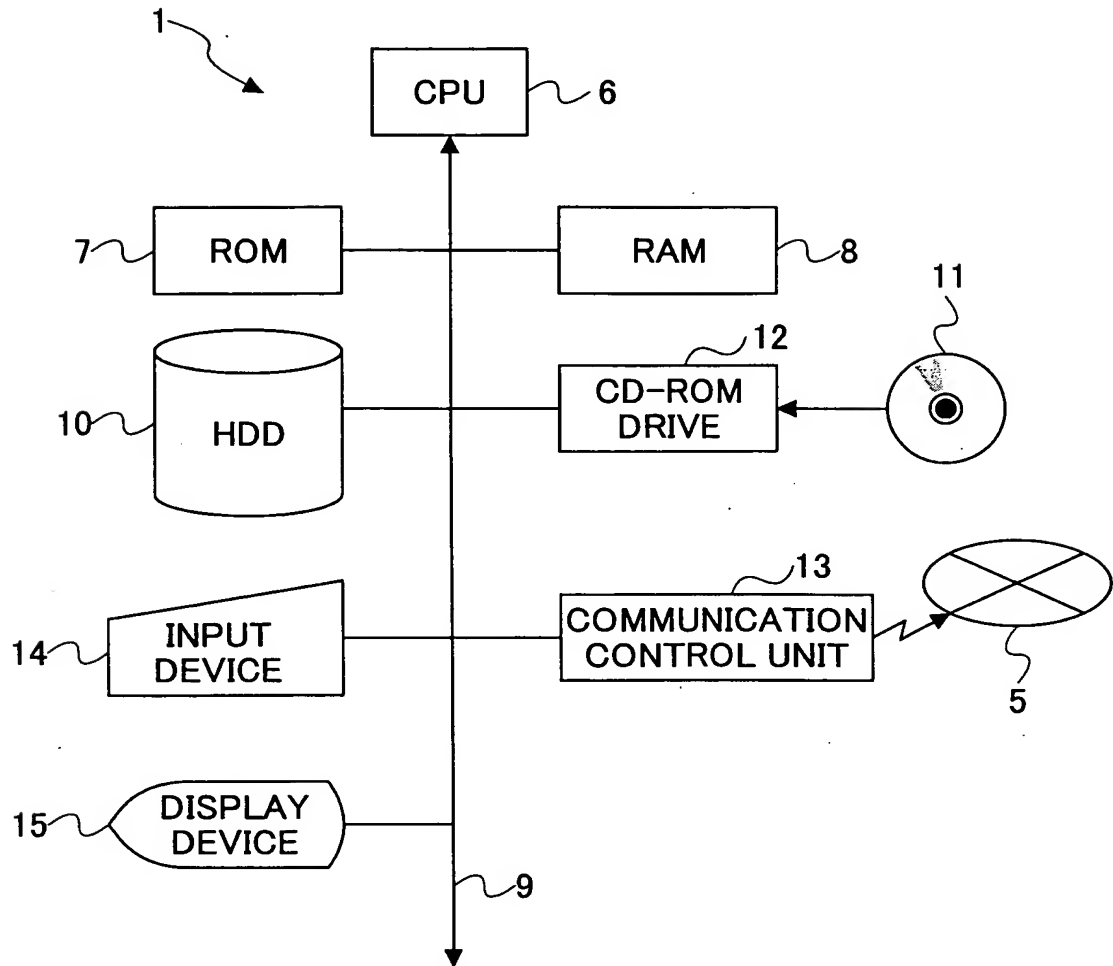


FIG.9

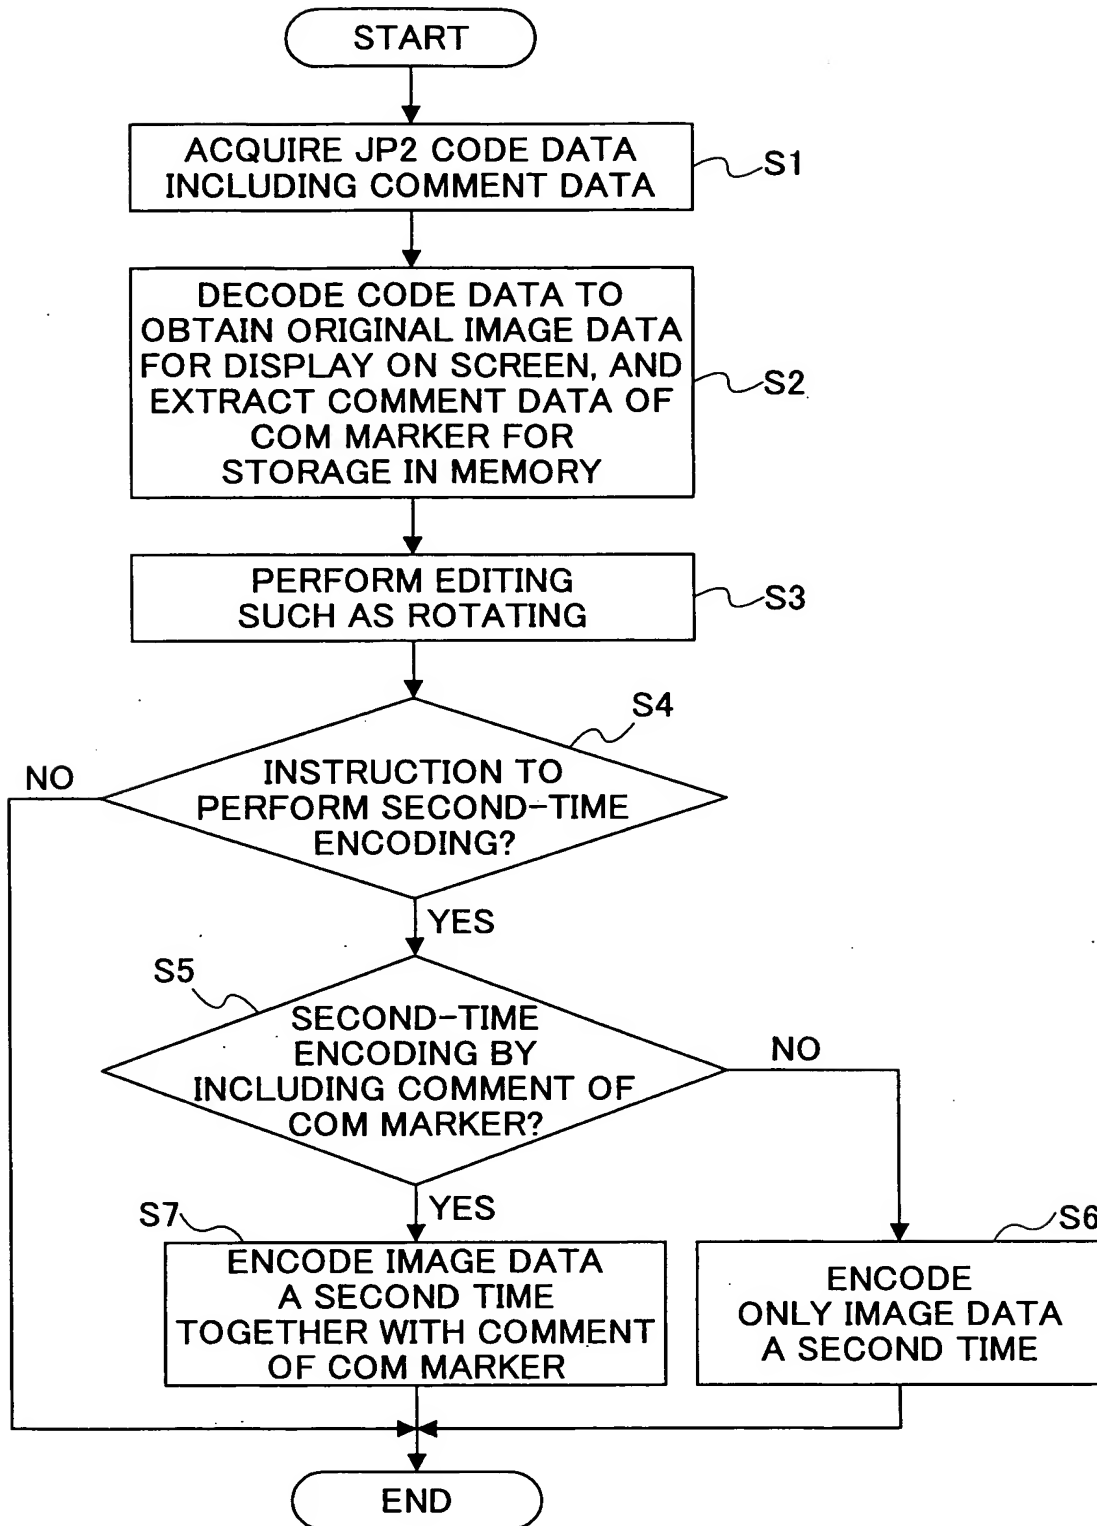


FIG.10

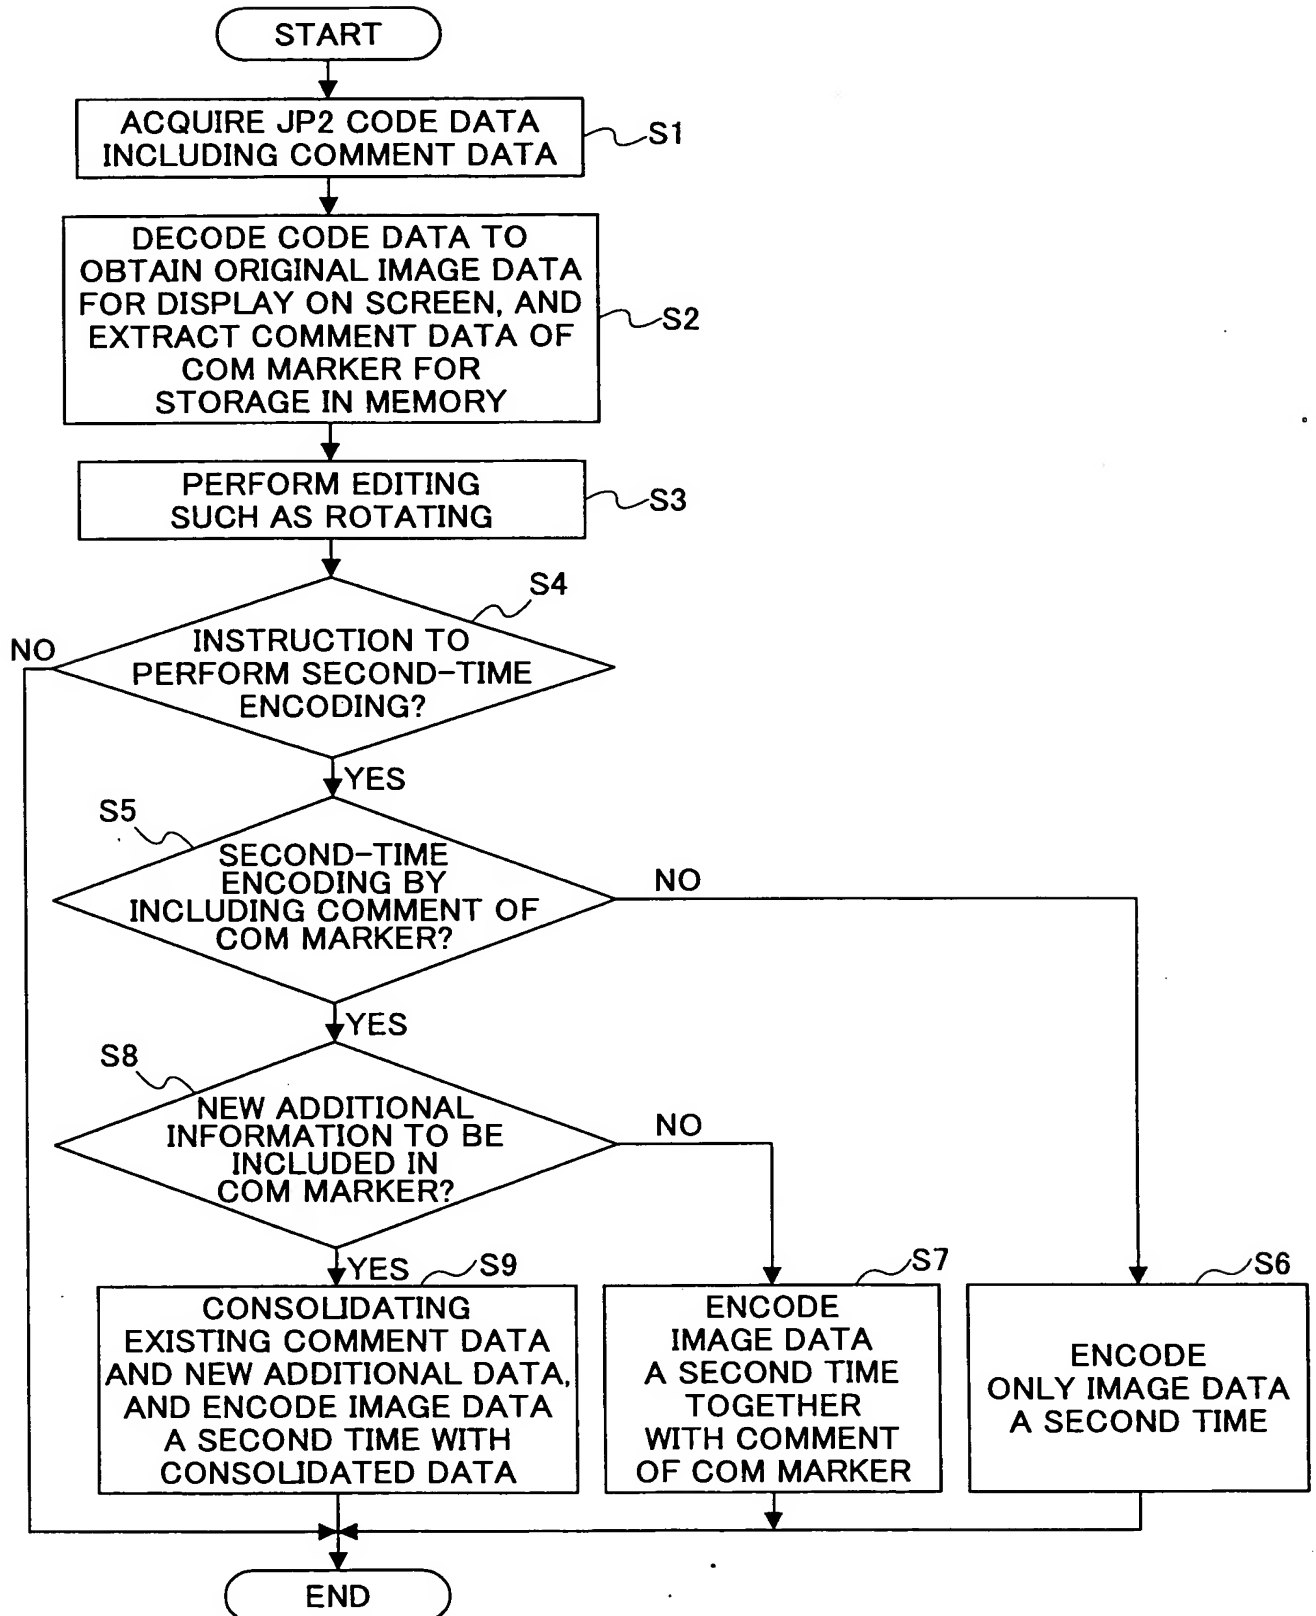




FIG.11

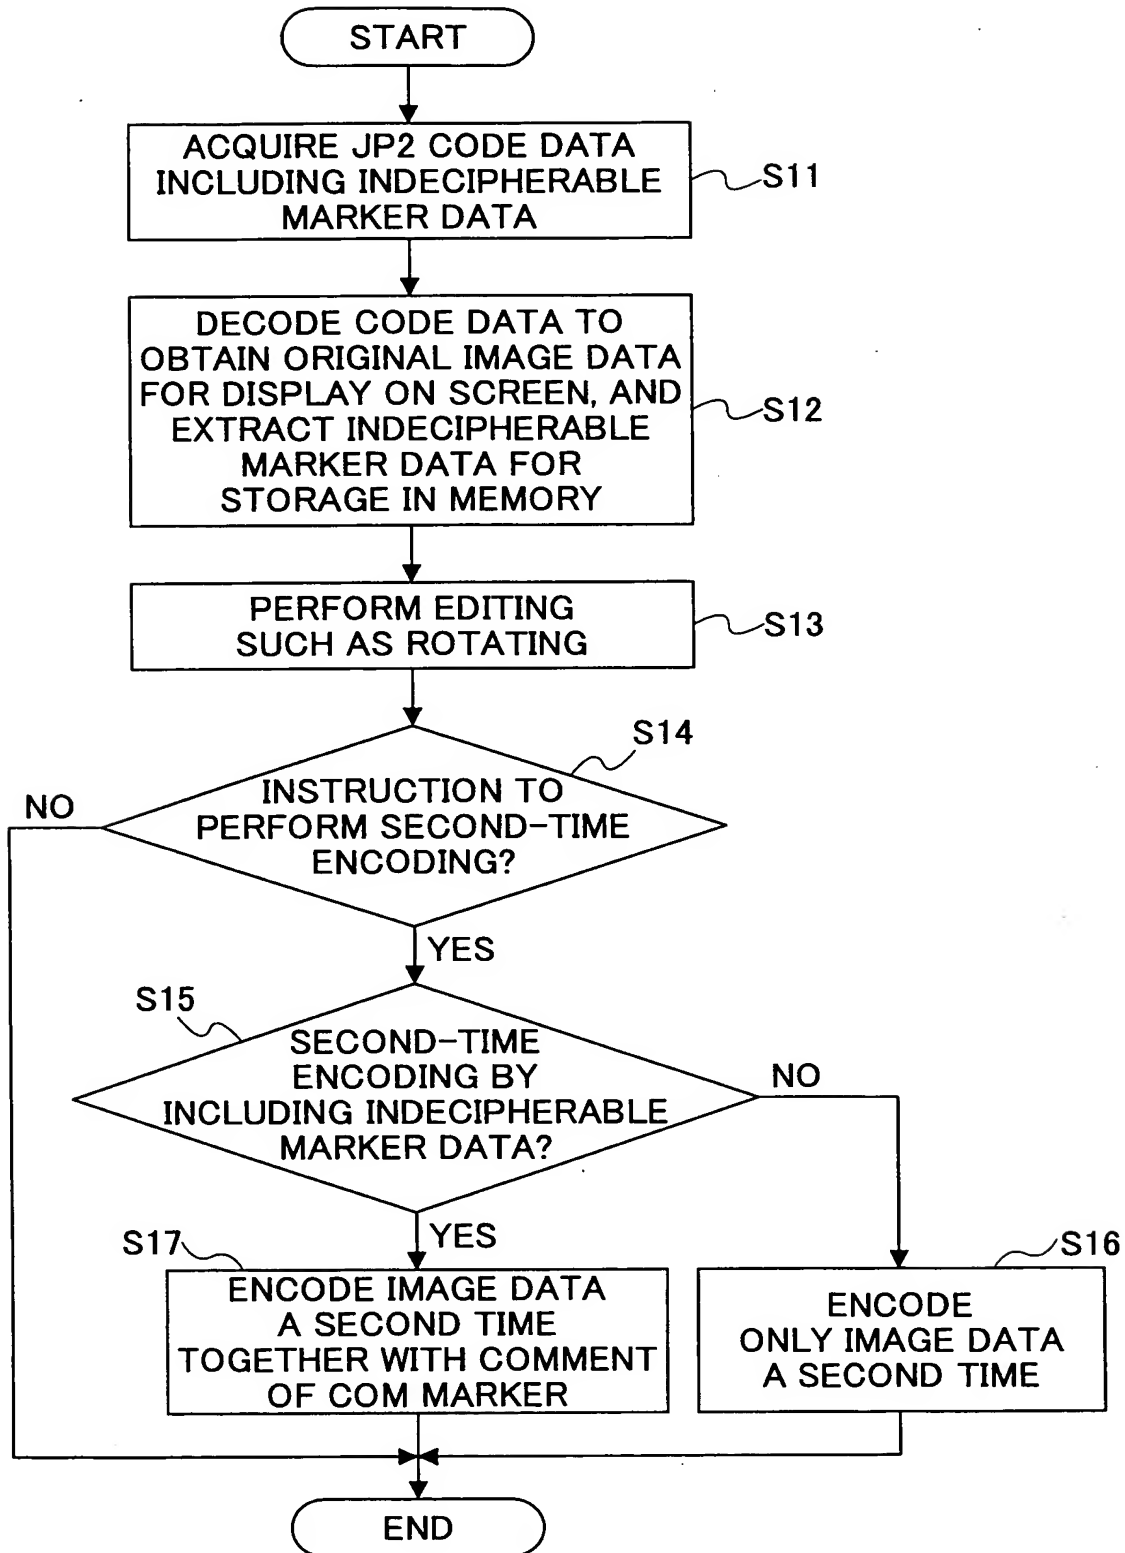


FIG.12

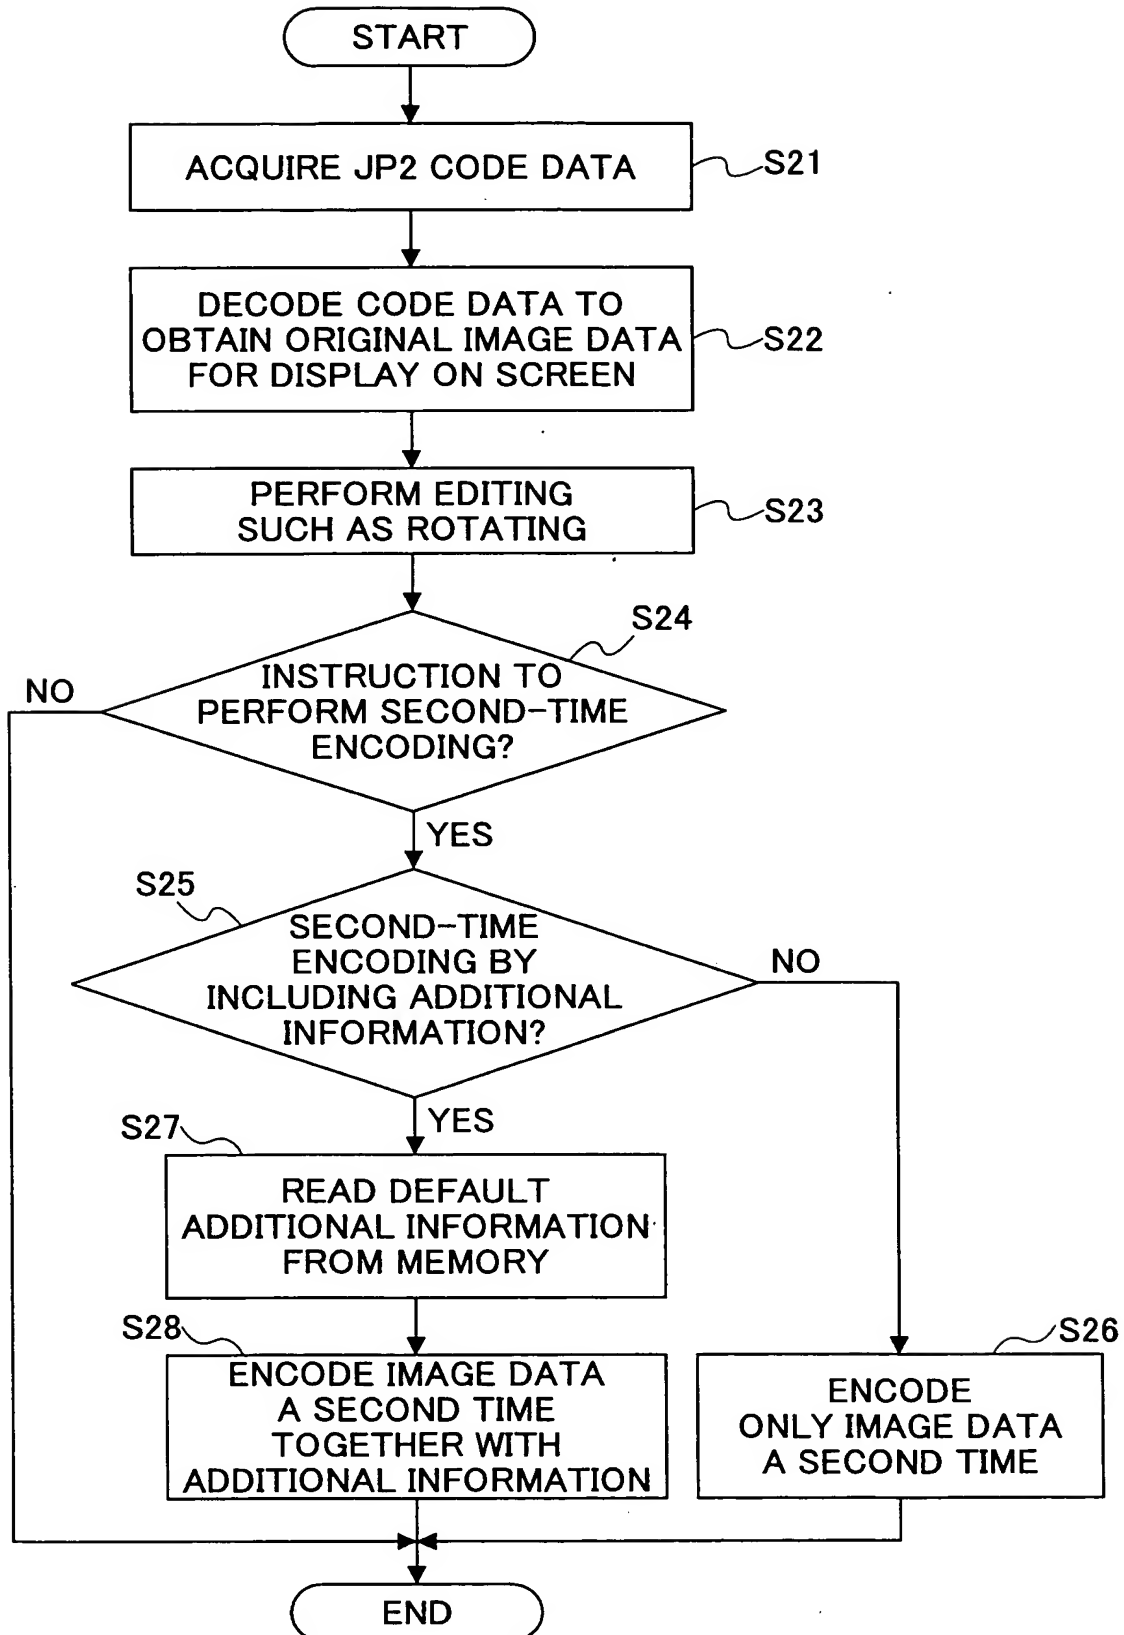


FIG.13

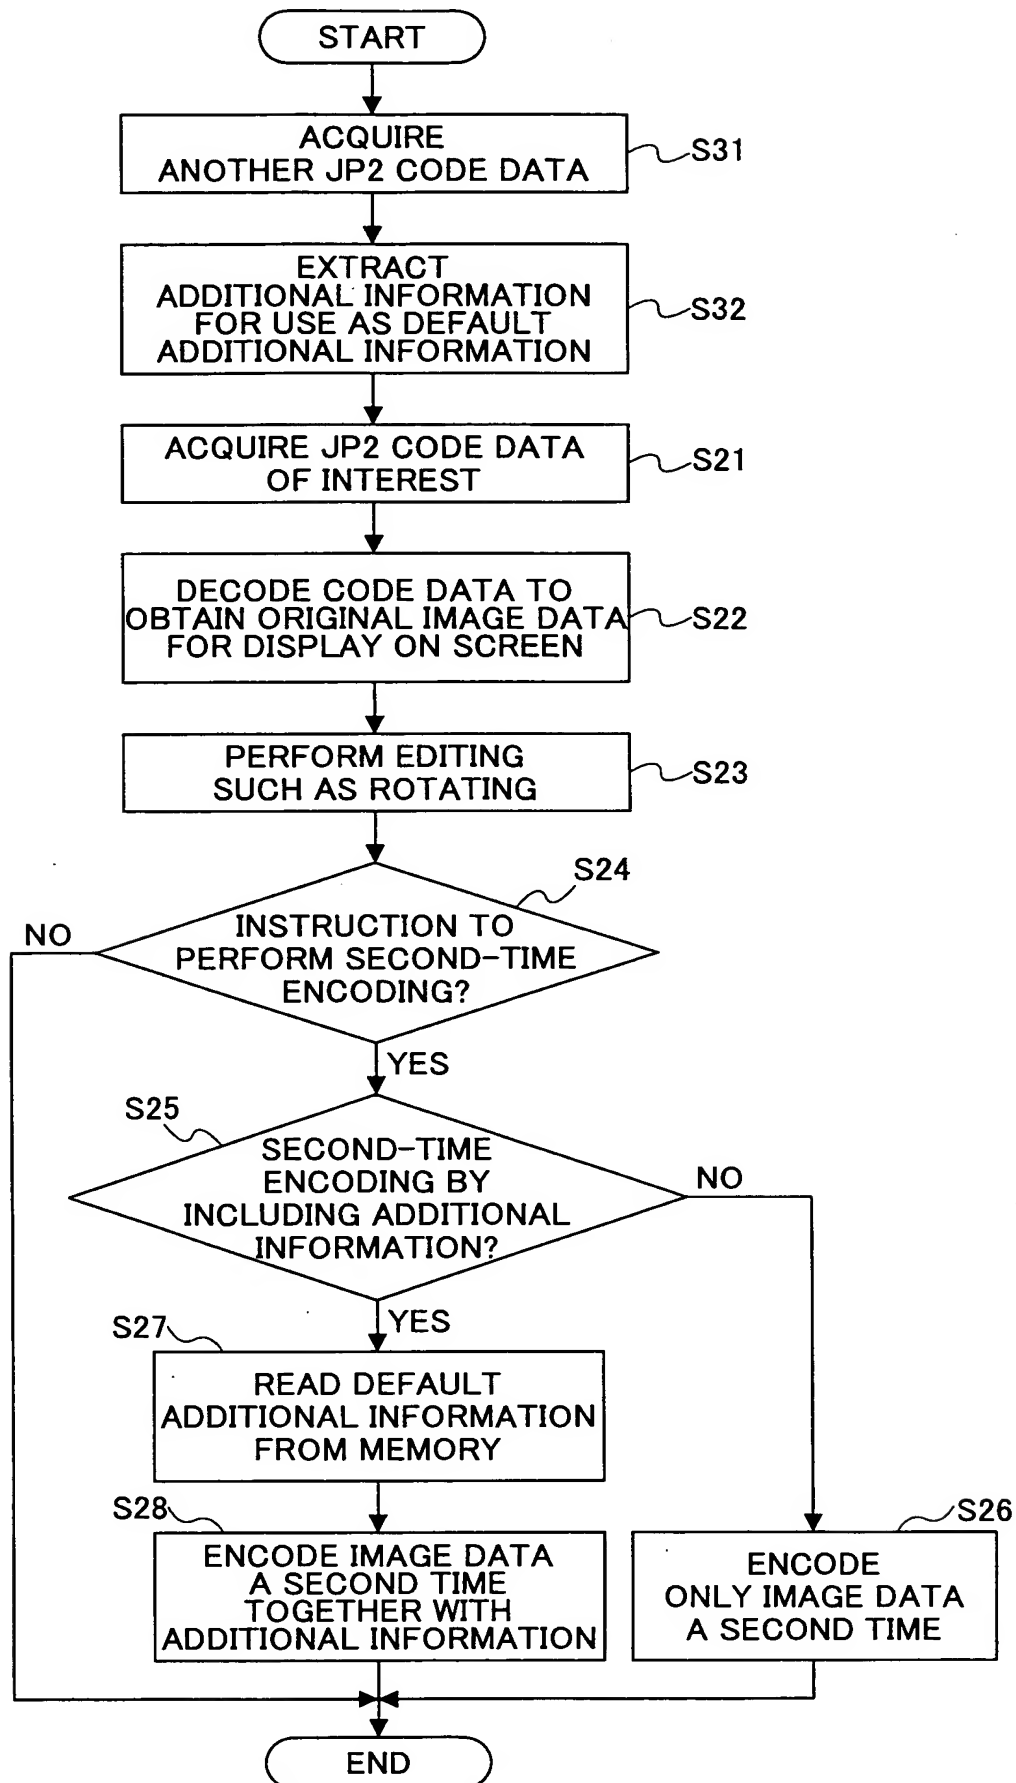


FIG.14

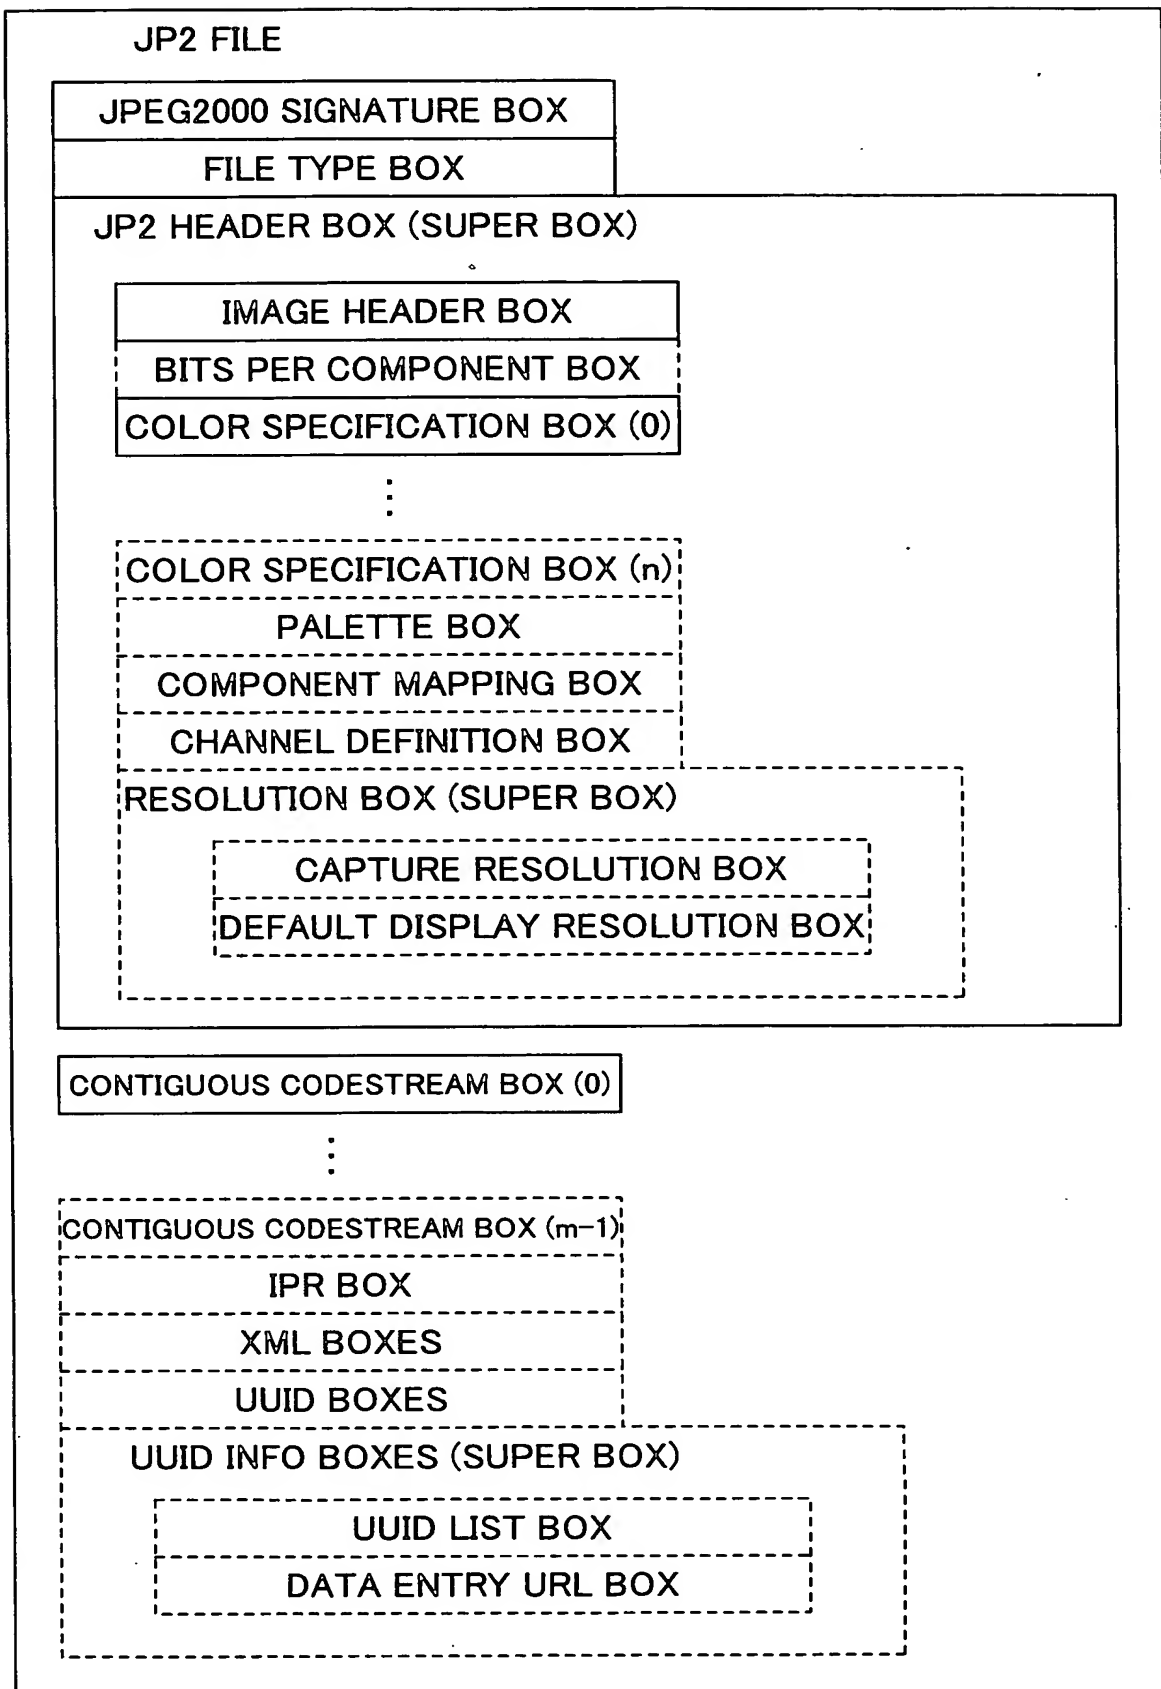


FIG.15

